SNAP U2

YOUR POCKET CAMERA REDESIGNED.
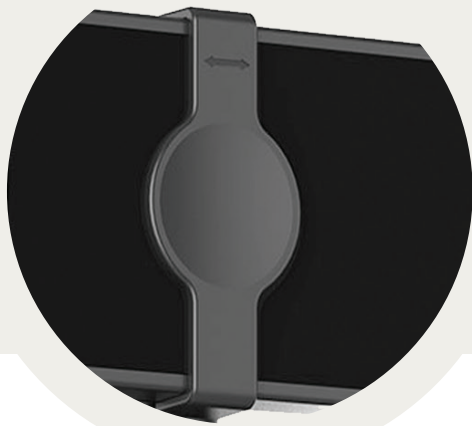
1080p **FULL HD**

FOV 75° 75°

BULIT IN MIC

USB

USB Video Conference Camera

The Snap U2 is a portable full HD pocket camera that is compatible with all video conferencing applications. This easy to mount and use web camera comes with a powerful wide angle lens that covers all participants in a small meeting room or huddle room

Work from Home | Tele Consulatation | Teach from Home

Add a touch of realism

Extraordinary Video Conferencing Experiences

Privacy Cover(Optional)

Prevent hackers from misusing your device orunintentional switching onof the camera

Built-in Microphones (Optional)

Capture every spoken word so you deliver crisp audio without background disturbances

IS 616 : 2017

R-61002399
www.bis.gov.in

CE

FC

MAKE IN INDIA

RoHS
COMPLIANT

SNAP U2
SPECIFICATION

A&T ™
CONNECTING YOU **ACROSS SPACE AND TIME**

Ordering Information	SNAP U2			
Web Camera	10102823SE	10102621SE	10102923SE	10102124SE
Camera				
Main IC	Supports MJPEG / H.264 / H.265 compression image processing chip, supporting various ISP processing algorithms			
Image Sensor	1/3 Inch 2.07 Megapixel sensor	1/3 Inch 2.07 Megapixel sensor	1/3 Inch 2.07 Megapixel sensor	1/3 Inch 5 Megapixel sensor
Resolution	1080p	1080p	1080p	1080p
Digital Zoom	NA	2X (Optional)	NA	4X (Optional)
Lens	f= 2.2mm	f= 2.2mm	f= 2.2mm	f= 2.2mm
FOV	75°	75°	75°	75°
IR Remote	NA	Yes (Optional)	NA	Yes (Optional)
Audio & Video				
Resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Video image format	YUV2 / MJPEG / H.264			
Frame Rate	30 fps	30 fps	30 fps, 60 fps	30 fps
Image Processing	Support 3D denoising, automatic white balance, automatic gain and other image processing algorithms			
Mic	NA	Mic - Pickup upto 1.5M Pickup upto 3M (Optional)	Mic - Pickup upto 1.5M	Mic - Pickup upto 1.5M
Noise Suppression	No	Yes	Yes	Yes
Other Features	Manual Rotation	Privacy cover 360° Manual Rotation	Privacy cover 360° Manual Rotation	360° Manual Rotation
Mounting Options	Monitor Mount	Monitor Mount & Tripod mount	Monitor Mount	Monitor Mount
Interface				
USB	USB 2.0 interface, 1.5M cable.		USB 2.0 interface, 1.5M cable	USB 3.0 interface, 1.5M cable
Physical Parameters				
Weight (g)	92g	110g	110g	100g
Dimensions(L*W*H)	75mm x 105mm x 33mm			
Power Supply	Power by USB			
Operating Temperature	-10° ~ +40°C			
Working Humidity	10% – 90%			
Applications				
Enterprise	Video Conference & Live webcast			
Medicine	Tele-medicine & Tele-consultation			
Education	Online Classes & Lecture Capture			

CONNECTING YOU **ACROSS SPACE AND TIME**